

● **How to install “fc” (foot-candle)/ “fc· s” (foot-candle per second) firmware(Windows)**

a.) Download the “C700\_ft-cd.zip” file from the page below.

<http://www.sekonic.com/support/downloads/dtsssoftwareformacandwindows.aspx>

b.) Turn on your computer and start Windows. After unzipping downloaded file from website, there are “C700\_ftcd.exe” file and “SkCommIo.dll” file in the folder.



Figure 1.  
C700\_ft-cd.zip



Figure 2. C700\_ftcd.exe and SkCommIo.dll in folder

c.) Put both files on your desktop.

d.) Connect the USB cable to the computer.

e.) Check that the power to SPECTROMASTER is turned off.

f.) Connect the USB cable to SPECTROMASTER.

g.) Turn on the power to SPECTROMASTER.

h.) Double-click the “C700\_ftcd.exe” in your desktop



Figure 3.

C700\_ftcd.exe icon in desktop file

i.) “C-700 Series ft-cd Setting Tool” screen appears and click the “Setting” .  
Then, the update is completed.

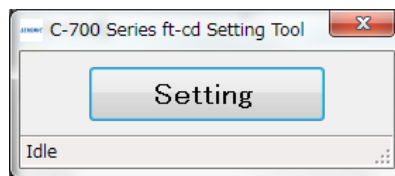


Figure 4. C700 Series ft-cd Setting Tool screen

● **How to select the Unit of Illuminance**

Now, your SPECTROMASTER can show “fc(fc·s)”.

Please read C-700R SpectroMaster Instruction Manual at P.138

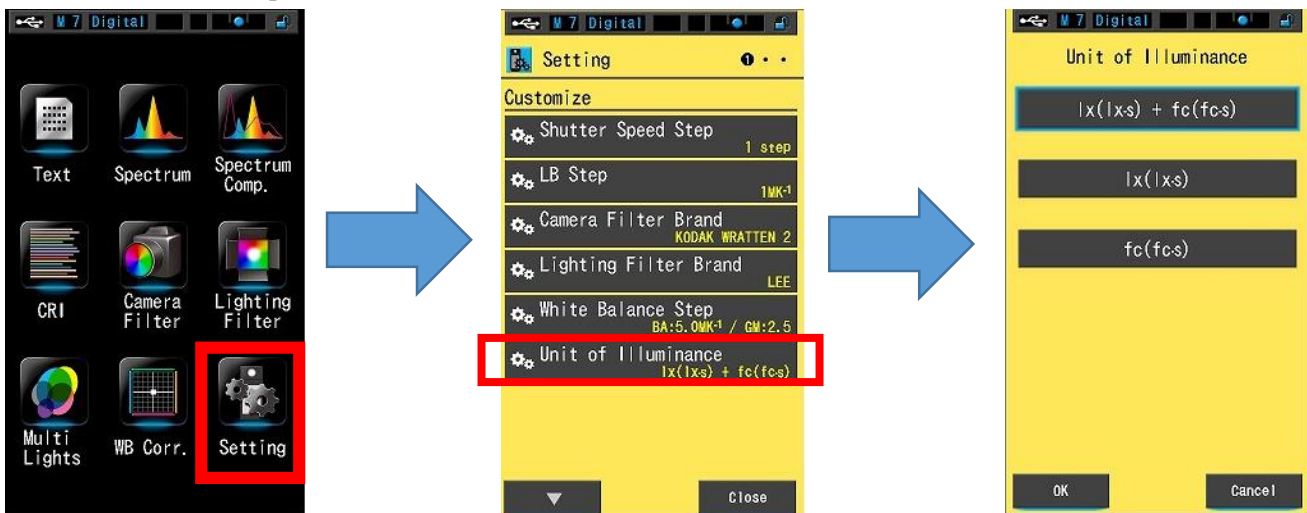


Figure 5. Selecting the Unit of Illuminance